

04/25/00
JCT96 U.S. PTO

4-27-00

A

Attorney Docket No.: EXIO-000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Application

I hereby certify that this transmittal of the below described documents is being deposited with the United States Postal Service in an envelope bearing Express Mail Postage and an Express Mail label, with the below serial number, addressed to the Commissioner of Patents and Trademarks, Washington, D.C., 20231, on the below date of deposit.			
Express Mail Label No.:	EJ256459654US	Name of Person Making the Deposit:	ANTHONY CHOU
Date of Deposit:	04/25/00	Signature of the Person Making the Deposit:	<i>Anthony Chou</i>

Inventor(s): Chol Su Kang, Sang Kyoon Hyun and Ki Hyun Joo

Title: IN-BUILDING CODE DIVISION MULTIPLE ACCESS WIRELESS SYSTEM AND METHOD

The Commissioner of Patents and Trademarks
Washington, D.C. 20231
Sir:

Transmittal of a Patent Application
(Under 37 CFR §1.53)

Transmitted herewith is the above identified patent application, including:

- ☒ Specification, claims and abstract, totaling 32 pages.
- ☐ Formal drawings, totaling pages.
- ☒ Informal drawings, totaling 10 pages.
- ☒ Declaration and Power of Attorney.
- ☐ Information Disclosure statement.
- ☐ Form 1449
- ☒ Assignment(s)
- ☒ Assignment Recordation Form (duplicate)
- ☐ Preliminary Amendment
- ☐ Other:

FEES DUE

The fees due for filing the specification pursuant to 37 C.F.R. § 1.16 and for recording of the Assignment, if any, are determined as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEES
Basic Application Fee					\$690.00
Total Claims	30	Minus 20=	10	X \$18 =	\$180.00
Independent Claims	4	Minus 3=	1	X \$78=	\$78.00
If multiple dependent claims are presented, add \$260.00					\$0.00
Add Assignment Recording Fee of \$40.00 If Assignment document is enclosed					\$40.00
TOTAL APPLICATION FEE DUE					\$988.00

PAYMENT OF FEES

The full fee due in connection with this communication is provided as follows:

1. Not enclosed
☐ No filing fee is to be paid at this time.
2. Enclosed
☒ Filing fee
☒ Recording assignment
☐ Petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or cannot be reached
☐ For processing an application with specification in a non-English language
☐ Processing and retention fee
☐ Fee for international-type search report
☒ A check in the amount of \$

This application is filed pursuant to 37 C.F.R. § 1.53 in the name of the above-identified Inventor(s).


Please direct all correspondence concerning the above-identified application to the following address:

EXIO COMMUNICATIONS, INC.
2362 Qume Drive, Suite C
San Jose, California 95131
(408) 938-9393

- ☒ This transmittal ends with this page.

Respectfully submitted,

Date: 4/25/00

By: 
Duke Amaniampong
Reg. No. 45,806

UNITED STATES PATENT APPLICATION

FOR

**A IN-BUILDING CODE DIVISION MULTIPLE ACCESS
WIRELESS SYSTEM AND METHOD**

INVENTORS

Chol Su Kang

Ki Hyun Joo

Sang Kyoong Hyun

A IN-BUILDING CODE DIVISION MULTIPLE ACCESS WIRELESS SYSTEM AND METHOD.

FIELD OF THE INVENTION

The present claimed invention relates generally to the field of wireless communication systems. More particularly, the present claimed invention relates to code division multiple access communication systems.

BACKGROUND ART

Communication systems that utilize coded communication signals are well known in the art. One such system is a code division multiple access (CDMA) cellular communication system such as set forth in the Telecommunications Industry Association/Electronic Industries Association International Standard (TIA/EIA IS-95), hereinafter referred to as IS-95. In accordance with the IS-95, the coded communication signals used in CDMA systems comprise CDMA signals that are transmitted in a common 1.25MHz bandwidth to base stations of the system from mobile or wireless communication units, such as cell phones or portable wireless computers or wireless handheld devices, that are communicating in a specific coverage area of the base station. In conventional CDMA systems, the base station communicates with a base station controller which allows the communication unit to communicate with other communication units within the same coverage area. Each CDMA signal includes a pseudo-noise (PN) sequence associated with a particular base station and an identification number of a communicating communication unit.

Typically, the base station controller is connected to a mobile switching controller (MSC) which allows a base station to connect with other base stations

outside its coverage area in order to allow a communicating communication unit communicated with other units outside its coverage area.

Figure 1 illustrates a conventional CDMA communication system 100 including a first base station 110, a second base station 120, and one or more communication units 105, 106. The communication system 100 illustrated in Figure 1 is an exemplary CDMA system which includes a direct sequence CDMA cellular communication system, such as that set forth in TIA/ETA IS-95.

In the system shown in Figure 1, the base station 110 and 120 are connected to a base station controller 130 and a mobile switching controller 140 which is in turn connected to the public switched telephone network (PSTN) 150 using known techniques.

The system shown in Figure 1 further connects to the public land mobile network (PLMN) to allow mobile communication units travel from one network (roaming) to another while maintaining a subscriber profile information. A detailed illustration of the PLMN is shown in Figure 1B. In the system shown in Figure 1B, a conventional cellular (or PCS) wireless communication network is shown. In the network shown in Figure 1B, a network subscriber's profile information is typically stored and maintained in a home location register (HLR). One HLR is typically required per service provider.

Typically when a new subscriber is activated, the service profile such as the subscriber's charging rate and service restrictions (e.g. no international call allowed) are included in the profile. The service profile of all communication units within a network is stored in the HLR located in the home network of the

communication unit. Since a user in one cellular (or PCS) network can move into another network and use services within that network, communication exists between networks to share service profiles. For example if a subscriber subscribing services from a service provider in a particular state (e.g. GTE mobile services in State 1) travels to another state with a different service provider (e.g. CellularOne in State 2) and attempts to make a call in State 2, the cellular system in State 2 will query the HLR in State 1 for the service profile of the network user.

This type of inter-networking communication is carried out using ANSI-41D mobile application protocol. The conventional cellular network uses ANSI-41D protocol on top of SS7 transport protocol to handle all inter-networking communications. These inter-networking communications are very costly and inflexible due to the fact that the SS7 interface card which enables the inter-networking communication can cost upwards of \$10,000.00 and also has some configuration inflexibility due to the proprietary nature of the interface cards.

Still referring to Figure 1, when a communication unit initiates a call sequence to either one of the base stations 110 and 120 within a coverage area, an end-to-end connection is established between the respective base station and the base station controller 130 and the MSC 140 using known CDMA call setup techniques. The base stations 110 and 120 typically communicates with the BSC 130 and the MSC 140 via communication links, such as a T1 connection. Base stations 110 and 120 typically have antennas to define the coverage area within which either base stations primary accommodate the communication units.

In the system shown in Figure 1, when a communicating communication unit initiates a call sequence (uplink) to the nearest base station, the call is

assigned to the target communication unit via the BSC 130 and the MSC 140 within a prescribed bandwidth (e.g. 1.25 MHZ for IS-95).

In conventional CDMA systems, voice quality is degraded as more subscribers originate calls over the system and as a communicating communication unit strays further away from its base station. Although, voice degradation can sometimes be acceptable to a user using the communicating communication unit because the user can always repeat an earlier transmitted message, data communication is more susceptible to degradation. This is because in the case of data degradation, the sender of the data does not know at what point that data being sent by a communicating communication unit begins to degrade or is lost. Consequently, if data transmission begins to degrade or is lost, the communication unit will have to resend the entire data. Such retransmission can be costly.

Also, in the conventional CDMA system shown in Figure 1, communication between a communicating communication unit and the base station requires a dedicated end-to-end connection between the base station, the base station controller and the mobile switching controller. Such dedicated end-to-end connection can also be very expensive and time consuming.

Another problem with the conventional system described in Figure 1 is that the communication interface between the base station and the base station controller requires proprietary interface technology which makes scaling the system to other communication platforms very cumbersome and expensive. Furthermore, most of these conventional CDMA communication systems utilize a T1 or E1 communication pathway which have bandwidths of 1.544Mbps for T1

connections and 2.04Mbps for E1 connections and are not known to handle data bursts and therefore very slow for the transmission of data.

To alleviate some of the problems of the prior art, some prior art CDMA systems such as illustrated in Figure 2 use multi-carrier base stations to handle multiple calls and handoffs to and from the base stations. In this system, a communicating communication unit is able to utilize different carriers in the base station for transmitting and receiving calls.

Although such multicarrier systems may alleviate the problems with voice quality degradation, they do not handle data transmission very well. Thus, these prior art solutions do still have problems with the quality of data calls transmitted with a coverage area from the base stations.

In the exemplary CDMA system shown in Figure 1, each base station transmits a pilot signal having a common PN spreading code that is offset in code phase from the pilot signal of other base stations within the system. During system operation, the mobile communication unit is provided a list of code phase offsets corresponding to neighboring base stations surrounding the base station through which communication is established. The mobile unit is equipped with a searching function which allows the mobile unit to track the signal strength of the pilot signal from a group of base stations including the neighboring base stations.

Various methods exist for switching the mobile communication unit from one base station to another (typically known as "handoff"). One such method is termed a "soft" handoff, in which communication between the mobile unit and

the end user is uninterrupted by the eventual handoff from an original base station to a subsequent base station. This method is considered a soft handoff in that communication with the subsequent base station is established before terminating communication with the original base station. When the mobile unit is communicating with two base stations, a single signal for the end user is created from the signals from each base station by a communication system controller.

Mobile unit assisted soft handoff operates based on the pilot signal strength of several sets of base stations as measured by the communication unit. An active set is the set of base stations through which active communication is established. A Neighbor Set is a set of base stations surrounding an active base station comprising base stations that have a high probability of having a pilot signal strength of sufficient level to establish communication.

When communications are initially established, the communication unit communicates through a first base station, and the unit monitors the pilot signal strength of the base station in the Active Set and the Neighbor Set. When a pilot signal of a base station in the Neighbor Set exceeds a predetermined threshold level, the base station is added to the Candidate Set and removed from the Neighbor Set at the communication unit.

The communication unit communicates a message identifying the new base station. The base station controller decides whether to establish communication between a new base station and the communication unit. Should the base station controller decide to do so, the base station controller sends a

message to the new base station with Identifying Information about the communication unit and a command to establish communications.

When the communication unit is communicating with multiple base stations, it continues to monitor the signal strength of base stations to determine which base station to connect to in the event of a signal strength degradation.

Each base station has a coverage area that has two Handoff boundaries. A handoff boundary is defined as the physical location between two base stations where the link would perform the same regardless of whether the mobile unit were communicating with the first or second base station. Each base station has a forward link handoff boundary and a reverse link handoff boundary.

The forward link handoff boundary is defined as the location where the mobile unit's receiver would perform the same regardless of which base station it was receiving. The reverse link handoff boundary is defined as the location of the mobile unit where two base station receivers would perform the same with respect to that mobile unit. Ideally these boundaries should be balanced, meaning that they have the same physical location with respect to the base station. If they are not balanced, system capacity may be reduced as the power control process is disturbed or the handoff region unreasonably expands.

In any of these conventional systems, the soft handoff between base stations still require the Active base station to maintain contact with the base station controller as it hands off communication to a neighboring base station or a candidate base station. Upon handing over communication, the new base station (now active base station) resumes communication with the mobile unit via the base station controller. The conventional system described in Figure 1 or

Figure 2 does not allow each base station to communicate with the other during a handoff since all communication have to go through the base station controller. This takes time and in a data traffic transmission can be costly.

Therefore, it is desirable to have a system and a method for transmitting CDMA calls including voice and data over a communication pathway with a higher bandwidth. It is further desirable to have a CDMA system that handles the transmission of calls, especially data calls, without the inherent call quality degradation. A need further exists for improved and less costly system which improves efficiency and the transmission rate and time of calls between a mobile unit and a base station and between base stations and a base station controller and between adjacent base stations.

SUMMARY OF INVENTION

The present invention is directed to a system and a method for providing an enterprise in-building or campus-wide IP based code division multiple access (CDMA) wireless system. The present invention is capable of handling both voice and data transmission within the CDMA system without the inherent delays and signal quality degradation encountered by conventional CDMA systems. The present invention further provides a system which does not require a dedicated end-to-end communication link when a communicating communication unit initiates or receives a call. This therefore provides a less costly and a timely way of transmitting data over a CDMA wireless at burst rates higher than conventional CDMA systems.

The invention includes an integrated wireless internet base station (WIBS) which is connected to the internet and an existing networking infrastructure within an office building or campus. The wireless base station utilizes known ethernet transmission protocols to transmit data over an ethernet back-bone to various wireless communication devices within a building. The wireless base station further includes a call processing module which is capable of determining whether a call originating from or received by the base station to and from a communication unit is either a voice or a data call. The WIBS also integrates the base station control functions of the prior art to reduce call setups between a communication unit and the WIBS, and call handoffs between multiple WIBS.

The invention further includes an integrated wireless internet server (WIS) which includes a base station controller module and a mobile switching module. The wireless server manages all calls processed by the base station. In the present invention, because the base station controller functions and the base

station functions are integrated in the wireless internet base station and connected to the ethernet back-bone, the base station does not have to send its signals over a long communication link to connect to a communicating communication unit. The integration of the base station controller and the base station further reduces call set-up time between a communicating communication unit and a mobile switching controller.

The wireless server also includes an ethernet protocol interface module to enable the server communicate over the ethernet back-bone and communicates over the back-bone and the internet using known ethernet and IP protocols. Since the ethernet back-bone uses a communication protocol different from the communication units, data received by the base station is packetized during processing into a format compatible with the ethernet transmission protocol of the ethernet back-bone and also to the internet.

The invention further includes a gateway which includes formatting logic to reformat data generated by the base station over the ethernet back-bone into a format compatible with the public switch network. A router is also connected to the ethernet back-bone to allow the WIBS send and receive data over the internet or an intranet.

The present invention further includes connection logic which allows multiple WIBS in the system to communicate with each other during a soft handoff of communications between a mobile unit and a WIBS. By enabling adjacent WIBS to communicate during a soft handoff, the present invention reduces the time it takes to implement soft handoffs in a CDMA system and further reduces potential data loss due to such handoffs.

The present invention further provides an implementation advantage over the prior art by allowing inter network communication between the wireless office communication system of the present invention and other mobile networks on the public land mobile network. The inter-networking communication of the present invention is implemented over an ANSI-41D using the ethernet transport protocol of UDP/IP or TCP/IP transport protocol via an ethernet interface to the ethernet back-bone of the system. The use of the ethernet interface is less costly than the prior art and further allows easy and flexible connectivity to existing in-office, building or campus networks.

These and other objects and advantages of the present invention will no doubt become obvious to those of ordinary skill in the art after having read the following detailed description of the preferred embodiments which are illustrated in the various drawing figures.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and form a part of this specification, illustrates embodiments of the invention and, together with the description, serve to explain the principles of the invention:

Prior Art Figure 1 is a block diagram of a conventional CDMA system;

Prior Art Figure 1B is a block diagram of an implementation the public land mobile network;

Prior Art Figure 2 is a block diagram of a conventional multiple carrier CDMA system;

Figure 3 is a block diagram of an embodiment of a wireless CDMA communication system of the present invention;

Figure 4 is a block diagram of an embodiment of the wireless base station of the present invention;

Figure 4B is a block diagram of an embodiment of call handoffs between multiple wireless base stations of the present invention;

Figure 5 is a block diagram of an embodiment of the wireless server of the present invention;

Figure 6 is a block diagram illustrating an embodiment of an inter-network communication implementation between the wireless server of the present invention and the public land mobile network;

Figure 7 is a flow diagram of a call request and processing method of one embodiment of the present invention; and

Figure 8 is a block diagram of an exemplary implementation one embodiment of the present invention within an office building.

EXIO-001

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made in detail to the preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings. While the invention will be described in conjunction with the preferred embodiments, it will be understood that they are not intended to limit the invention to these embodiments.

On the contrary, the invention is intended to cover alternatives, modifications and equivalents, which may be included within the spirit and scope of the invention as defined by the appended claims. Furthermore, in the following detailed description of the present invention, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be obvious to one of ordinary skill in the art that the present invention may be practiced without these specific details. In other instances, well known methods, procedures, components, and circuits have not been described in detail as not to unnecessarily obscure aspects of the present invention.

The invention is directed to a system, an architecture, subsystem and method to manage a wireless CDMA data connection in a way superior to the prior art. In accordance with an aspect of the invention, a base station allows CDMA call coverage within a building without requiring a dedicated and a lengthy end-to-end transmission.

In the following detailed description of the present invention, a system and method for a wireless internet protocol based communication system is described. Numerous specific details are not set forth in order to provide a

thorough understanding of the present invention. However, it will be recognized by one skilled in the art that the present invention may be practiced without these specific details or with equivalents thereof.

Generally, an aspect of the invention encompasses providing an integrated wireless internet protocol based in-building or campus-wide CDMA communication system which provides a wide range of voice, data, video and other services in conjunction with a private branch exchange interfaced to the Public Switched Telephone Network (PSTN) and the Public Land Mobile Network (PLMN). The invention can be more fully described with reference to Figures 3 through 6. Figure 3 is a functional illustration of the wireless system of the present invention. Wireless Office Solution system 300 (WOS) comprises, one or more mobile or wireless communication units 301-303, an enterprise local area network (LAN) 310, a wireless internet base station (WIBS) 320 coupled to an ethernet backbone of the LAN 310, a wireless internet server (WIS) 330 also coupled to the ethernet backbone of LAN 310, a communication gateway 340 coupled to 310 and the public switch telephone network (PSTN) and a communication router 350 which couples to LAN 310 and the internet or intranet between office buildings.

Although the embodiment described above has been described with reference to one WIBS, the present invention is adaptable to handle one or more WIBS. Furthermore, the present invention is adaptable to have one or more WIS coupled to the ethernet back-bone.

WOS 300 preferably is adapted to function with a code division multiple access (CDMA) wireless technology. However, the present invention is

adaptable equally to a time division multiple access (TDMA) system and other applicable wireless technologies.

Still referring to Figure 3, WIBS 310 is a IP based system which enables WOS 300 to take advantage of existing networking infrastructure in an office building or a similar environment to communicate wireless calls from the mobile units to other wireless devices on the network, internet or to the PSTN. WIBS 310 includes switching functions to process traffic from various sources such as voice and data for delivery over the ethernet back-bone. Integration of base station controller and mobile switch controller functions enables WIBS 310 manage and coordinate radio resources to effect operations such as call origination, terminations and handoffs.

WIBS 310 further provides interface between a CDMA PCS or a cellular mobile communication system and the WIS 320 to enhance mobility within a wireless office environment covering hot spots or dead spots traditional public cellular or PCS networks such as on-campus, or the load etc. could not address.

WIBS 310 is coupled to the ethernet back bone preferably through a 10/100 base-T interface and related software stack to handle data burst on the LAN that traditional CDMA system could not handle. WIBS 310 receives and sends data to and from cellular regions to other subscription units in the WOS. WIBS 310 receives radio signals from mobile units and packetizes the contents of the signals into data packets that are delivered over the ethernet back-bone to various destinations such as the PSTN and the internet.

Still referring to Figure 3, WOS 300 further includes a wireless internet server (WIS) 340 which couples to ethernet back-bone 301 to provide directory registry functionality to mobile units communication with WOS 300. In the preferred embodiment of the present invention, WIS 340 integrates both base station controller and mobile switch controller functionality to enable WIS 340 manage calls received by WOS 300.

Referring still to Figure 3, gateway 340 is coupled to the ethernet back-bone 301 to receive converted voice signals with WOS 300 from WIBS 310 for delivery to the PSTN. In the present invention gateway 340 preferably is a PSTN or Trunk gateway manufactured by Cisco® systems.

Router 350 is also coupled to the ethernet back-bone 301 to receive and deliver data packets from WIBS 310 to mobile units coupled to the internet or intranet requiring data traffic from WIBS 310. In the preferred embodiment router 350 may be any of the routers manufactured by CISCO® systems.

Referring to Figure 4, a functional block diagram of the wireless internet base station is illustrated WIBS 310. The WIBS 310 is comprised of a LAN interface which couples to the ethernet backbone for communication with other subsystems in WOS 300. The LAN interface couples data converted by WIBS 310 to the other subsystem via interface 450 to the internet.

WIBS 310 further comprises call processing module 410 which includes call processing logic 411 and call selection and distribution logic 412. Call received by WIBS 310 from mobile units, for example 301, are processed by call

processing logic and provided to call selection and distribution unit logic 412 for transmission over to the LAN to other subsystems in WOS 300.

In the present invention, WOS 300 may include a plurality of WIBS. In the case where the WOS has multiple WIBS, each WIBS has a coverage area over the LAN with typically two handoff boundaries. The handoff boundary defines the physical locations between two WIBS coupled to the ethernet backbone where a mobile communication unit link would perform in the same manner regardless of which WIBS it was receiving.

The WIBS has a forward and reverse link boundary similar to the prior art. The forward link is defined as the location where the mobile communication unit's receiver would perform the same regardless of which WIBS it was receiving. The reverse link handoff boundary is defined as the location of the mobile communication unit where two WIBS receivers would perform the same with respect to that mobile unit.

In the WIBS 310 of the present invention, the call selection distribution unit logic 412 is integrated into the call processing module 411 to handle call handoffs. In most CDMA systems, the path loss of signal is extremely dynamic. Especially when the mobile unit is at the boundary of multiple cells. The signal path to the communication unit from a base station could fluctuate a lot. For example, in Figure 4B the signal path of base station 1 to the mobile unit may be better than the signal path from base station 2 to the communication unit. But all this could change in a few milliseconds in which the signal strength of base station 2 becomes better than that of base station 1.

The signal conditions over the RF frequency band also changes dynamically and instantaneously. In order to select the better signal path from the mobile communication unit and multiple base stations, the CDMA system typically incorporates a signal selection and distribution functions.

In most conventional CDMA systems, the SDU is in the base station controller. In this system during a reverse link, the SDU performs a selection function by receiving voice packets from the mobile communication unit from two or more different base stations. The SDU selects the packet with the best reception and transmits it. This selection process is continuously performed every 20 milliseconds, 50 times per second.

During a forward link, the SDU performs a distribution function by simply distributing the same voice packets into multiple base stations. The base stations will send the same voice packets and the mobile communication unit performs the selection of voice packets transmitted from the multiple base stations.

Prior art systems integrate the SDU functions in the base station controller because it is the first concentration point of voice paths from the mobile units via multiple base stations. Since the prior art system do not allow direct communications between base stations, it still takes a few milliseconds from the mobile units to handoff to adjacent base stations, especially during soft handoffs.

However, in the present invention, WIBS 310 incorporates the functions of the prior art's base station controller (BSC) and mobile switch controller (MSC), thus, multiple WIBS connected to the LAN can communicate directly with each

other to eliminate the time lost during soft handoffs between the mobile unit and the WIBS.

Still referring to Figure 4, the WIBS where the mobile unit initiates a call is called the anchor SDU (e.g. WIBS1 in Figure 4B). The anchor SDU performs the call selection and distributions of voice packets for the duration of the call for that particular mobile unit. Communication received from the mobile unit is processed and packetized for transmission over the ethernet back-bone via LAN interface 450 to provide for delivery of the CDMA data. Incoming calls are processed and provided to a plurality of interworking functions modules 420, 440. Communication between the interworking function modules and the mobile unit is provided via ethernet back-bone 301.

During a call selection sequence, the SDU receives multiple copies of the same packets of information from the same communication unit via multiple WIBS. As shown in Figure 4B, when the communication unit moves to the boundary area between WIBS1 and WIBS2, the anchor WIBS (e.g. WIBS1) detects this movement and requests WIBS2 to start send and receive packets. During a soft handoff, both WIBS1 and WIBS2 receive packets from the communication unit which includes packet quality measurement information and data time stamp. These packets are then routed to the anchor SDU for the selection process to begin.

When the communication unit moves deep into the coverage area of WIBS2, the anchor SDU requests the receiver in WIBS1 to stop processing the packets from the communication unit. This results in dropping the path of communication between the communication unit and WIBS1. However, WIBS

still continues to receive packets from WIBS2 even though there is no active communication between the communication unit and WIBS1.

In the present invention, incoming voice traffic from the communication unit is processed and delivered via IWF 420 to the LAN. IWF 440 couples to call processing module 410 to convert in-coming into IP data packets for delivery over the LAN to other data receiving wireless or communication units connected to the LAN. IWF 440 provides the respective interworking of speech signal into IP protocol packets which are delivered as CDMA data to LAN interface 450 for delivery to other subsystems in WOS 300 via the ethernet back-bone. By having both a voice and data IWF, the present invention is able to receive voice and data calls and interweave these calls for delivery over the LAN from a single mobile call.

Still referring to Figure 4, WIBS 310 further includes a plurality of CDMA modems coupled to modulate and demodulate calls within the WIBS. CDMA modems 400-405 include receiver logic and tracking logic for receiving and tracking incoming messages from a mobile units. In the modem one or more modulators perform spread-spectrum spreading code sequence generation. In addition, the modems generate, for example, a pseudonoise (PN) sequence and performs complex modulation to produce signals generated and transmitted with the mobile unit's pilot signal. The CDMA modems 400 - 405 demodulate and despread signal according well known CDMA techniques.

Referring now to Figure 5, functional block diagram of the wireless internet server is illustrated for WIS 330. WIS 330 comprises a LAN interface 520

which couples WIS 300 to the ethernet back-bone to provide call management functions to subsystems within WOS 300.

WIS 330 further includes a wireless mobility server (WMS) 500 which provides call control and mobility management for calls received by WIBS 310. WMS 500 includes mobile user profile information registry and WIBS information registry. WIS 330 further provides mobile switching functions and maintains directories of the WIBS connected to the LAN to enable mobile units communicating to the WOS 300 locate a WIBS.

WIS 330 further includes a call manager module which includes structure logic that establishes, maintains and removes calls from the WOS 300 subsystem. The call manager module further provides base station control functions which provides real time call processing functionality to WOS 300. The call manager performs signaling interface of radio resource management (i.e. channel allocation) and coordination of call resources such as call origination and termination and handoffs.

Figure 6 is a block diagram illustrating one embodiment of the advantages of the present invention. As described earlier, prior art CDMA systems implement an ANSI-41D protocol on top of a SS7 transport protocol for inter-network communications between two different mobile networks. The present invention, as shown in Figure 6, implements an ANSI-41D protocol utilizing a UDP/IP or TCP/IP transport protocol between WOS 300 and other networks on the PLMN.

WIS 300 is equipped with a low cost ethernet interface card which enables WOS 300 to utilize the existing ethernet transport protocol to allow inter-networking communication without the use of the costly SS7 interface cards. By using existing in-building network connections, the present invention provides the flexibility of configuration and use in the exchange of service profile information between networks which the prior art did not provide.

Referring to Figure 7, a flow diagram of one embodiment of the 700 processing of calls initiated by a mobile unit to WOS 300 is illustrated. As shown in Figure 7, a mobile call processing is initiated at step 710 when the WOS receives the mobile call. At step 720, WIS 330 determines whether the transmitting mobile unit's profile information is stored in WOS 300. If the mobile profile information is available, processing continues at step 740. If on the other hand, a transmitting mobile unit's profile information is not available in WOS 300, WIS 330 updates 730 its profile registers and the call processing continues at step 710.

If a transmitting mobile unit's profile information is identified in WIS 330, WIBS 310 checks to see if the transmitting request is a voice or a data request at step 750. If the transmitted request is a voice request, processing continues at step 760 where the received call is processed by call IWF 440. If the received call is a data call, the call is provided to data IWF 440 for processing.

Data received respectively from IWF 430 and IWF 440 are converted internally by WIBS 310 into IP protocol format packets at processing step 780 and sent 790 over the ethernet back-bone to either gateway 340 or router 350.

Processing of the incoming call ends at step 795 after WIBS 330 has delivered the processed call to the ethernet.

Figure 8 is a block diagram illustration of one embodiment of an implementation of the present invention in an office building. As shown in the Figure 8, the implementation includes a plurality of WIBS connected to a WIS which couples to the ethernet back-bone. The implementation further includes a plurality of repeaters to enable a wider horizontal and vertical coverage within a building. The use of repeaters is very important since prior art systems have difficulties transmitting signals vertically within buildings and also have limited horizontal in-building coverage. By using these repeaters, the present invention is able to provide a clear and distinct signal quality anywhere within a building.

The foregoing descriptions of specific embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and obviously many modifications and variations are possible in light of the above teaching. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the Claims appended hereto and their equivalents.

Claims:

1. A in-office wireless code division multiple access , CDMA, communication system, comprising:

a local area network, LAN, having an ethernet communication back-bone;
a plurality of CDMA wireless base stations coupled to said ethernet communication back-bone;
a wireless internet server coupled to said ethernet communication back-bone;
a plurality of wireless communication devices coupled to said CDMA wireless base stations via said ethernet communication back-bone;
a communication gateway coupled to said ethernet communication back-bone; and
a router coupled to said ethernet communication back-bone to enable said communication devices communicate to the internet.

2. The system as recited in Claim 1 wherein said wireless base station includes a plurality of CDMA wireless modem modules for providing a communication link to external wireless communication devices to the in-office wireless communication system.

3. The system of claim 2, wherein said wireless base station further includes a applications processing module for processing calls received and originated from said wireless base station.

4. The system of claim 3, wherein said call processing module formats call signals received by said wireless base station into data packets adaptable for the ethernet communication back-bone.

5. The system of claim 3, wherein said wireless base station further includes an inter-networking processing module for providing a communication channel between the internet and a wireless communication unit coupled to said ethernet communication back-bone.

6. The system of Claim 1, wherein said wireless internet server includes a wireless mobility module for managing mobile units within the system.

7. The system of Claim 1, wherein said wireless internet server provides real-time call processing.

8. The system of Claim 5, said wireless internet server includes an integrated base station controller module and a mobile switch controller module for managing calls between communications units within the system.

9. The system of claim 1, wherein the wireless internet server includes call manger processing module for managing calls received and calls originated from the in-office wireless communication system.

10. A wireless office communication solution system, comprising:

an ethernet communication pathway;

a wireless base station coupled to said ethernet communication pathway to receive and originate wireless communication traffic over said communication pathway; and

a wireless internet server coupled to said communication pathway to receive and manage wireless communication traffic over said communication pathway.

11. The system of Claim 10, further including a communication gateway coupled to said communication pathway for providing communication formatting logic for transmitting wireless call generated in the wireless base station to a public switch telephone network system.

12. The system of claim 10, wherein the wireless base station includes call selection modules for determining whether a call received or originated from the wireless base station is a voice call or a data call.

13. The system of claim 10, wherein the wireless base station includes call processing module for formatting wireless calls received by the wireless base station into formats adaptable for transmission on the ethernet communication pathway.

14. The system of Claim 10, wherein the wireless base station further includes a communication interface for providing communication protocols to enable the wireless base station communicate over the ethernet communication pathway.

15. The system of claim 10, wherein the wireless base station further includes a plurality of inter-networking functional modules for providing communication channel between the wireless base station and the internet.

16. The system of claim 10, wherein the wireless internet server includes call manager modules for handling calls processed by the wireless base station for transmission over the ethernet communication pathway.

17. The system of claim 16, wherein the wireless internet server further includes a communication interface module for providing communication protocol to allow the wireless internet server communicate over the ethernet communication pathway.

18. A code division multiple access, CDMA, communication system having a plurality of integrated wireless base stations, WIBS, having integrated base station controller and mobile switch controller function, the WIBS comprising:

a plurality of CDMA modems coupled to modulate and demodulate radio signals provided to said WIBS by a mobile communication unit;

call processing module coupled to receive and process calls by said WIBS;

a plurality of interworking function modules coupled to said call processing module to process voice and data calls received by said WIBS; and

a network interface unit coupled to said plurality of interworking function modules to format calls processed in said WIBS for delivery over an ethernet back-bone.

19. The WIBS of claim 18, wherein the call processing module includes call processing logic for processing calls received by the WIBS.

20. The WIBS of claim 19, wherein the call processing module further includes call selection and distribution logic for selecting and distributing calls to and from a mobile unit to the WIBS during a forward link and a reverse link.

21. The WIBS of claim 18, wherein the plurality of IWFs includes a call IWF for handling voice calls received by the WIBS.

22. The WIBS of claim 18, wherein the plurality of IWFs includes a data IWF for handling data call received by the WIBS.

23. The WIBS of claim 18, wherein the network interface module packetizes calls processed by the WIBS into data packets adaptable for transmission within an internet protocol transmission medium.

24. The WIBS of claim 20, wherein the call selection and distribution logic enables the WIBS to communicate with other WIBS coupled to the communication system.

25. The WIBS of claim 18, wherein the plurality of modems receive CDMA data.

26. A wireless office communication solution system, comprising:
an ethernet communication pathway;
a wireless base station coupled to said ethernet communication pathway to receive and originate wireless communication traffic over said communication pathway;
a wireless internet server coupled to said communication pathway to receive and manage wireless communication traffic over said communication pathway; and
a plurality of repeaters coupled to said ethernet communication pathway.

27. The system of Claim 26, further including a communication gateway coupled to said communication pathway for providing communication formatting logic for transmitting wireless call generated in the wireless base station to a public switch telephone network system.

28. The system of claim 26, wherein the wireless base station includes call selection modules for determining whether a call received or originated from the wireless base station is a voice call or a data call.

29. The system of claim 26, wherein the wireless base station includes call processing module for formatting wireless calls received by the wireless base

station into formats adaptable for transmission on the ethernet communication pathway.

30. The system of Claim 26, wherein the plurality of repeaters provides a wider horizontal and vertical wireless in-building aerial coverage.

EXIO-001

A IN-BUILDING CODE DIVISION MULTIPLE ACCESS WIRELESS SYSTEM AND METHOD

ABSTRACT OF THE DISCLOSURE

A wireless office communication system including a wireless internet base station (WIBS) encompassing a base station controller, a mobile switch controller and an ethernet interface module for coupling the WIBS to an existing internet protocol (IP) based network. The interface module provides for coupling the WIBS to an ethernet back-bone, a mobile communication unit and a public switch telephone network (PSTN). In one embodiment the wireless communication system includes a wireless internet server which also encompasses base station controller and mobile switch controller functions to enable the wireless communication system manage call mobility with the system. In one embodiment communication between the WIBS and the PSTN is in a IP data protocol format. The WIBS provides control and sequencing of all call control operations by handling both voice and data calls which are transmitted over the ethernet back-bone to the PSTN or the internet.

FIGURE 1
(PRIOR ART)

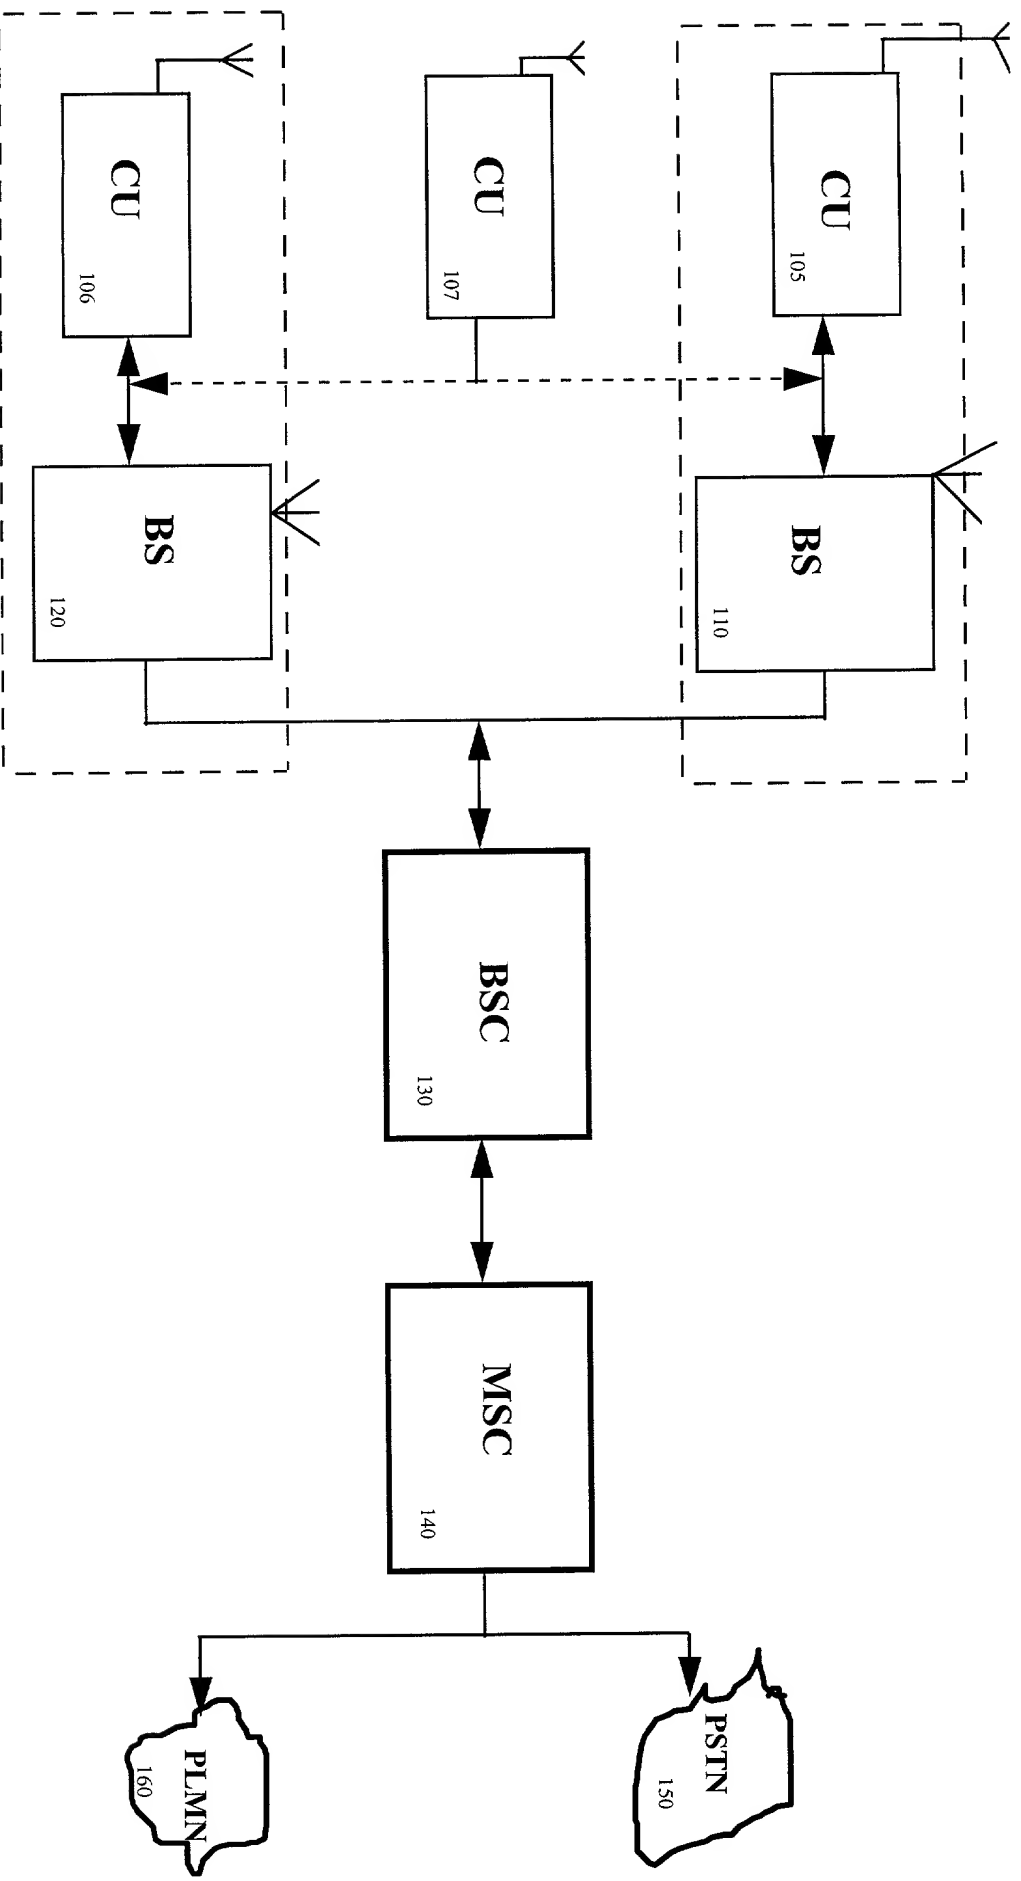


FIGURE 1B
(PRIOR ART)

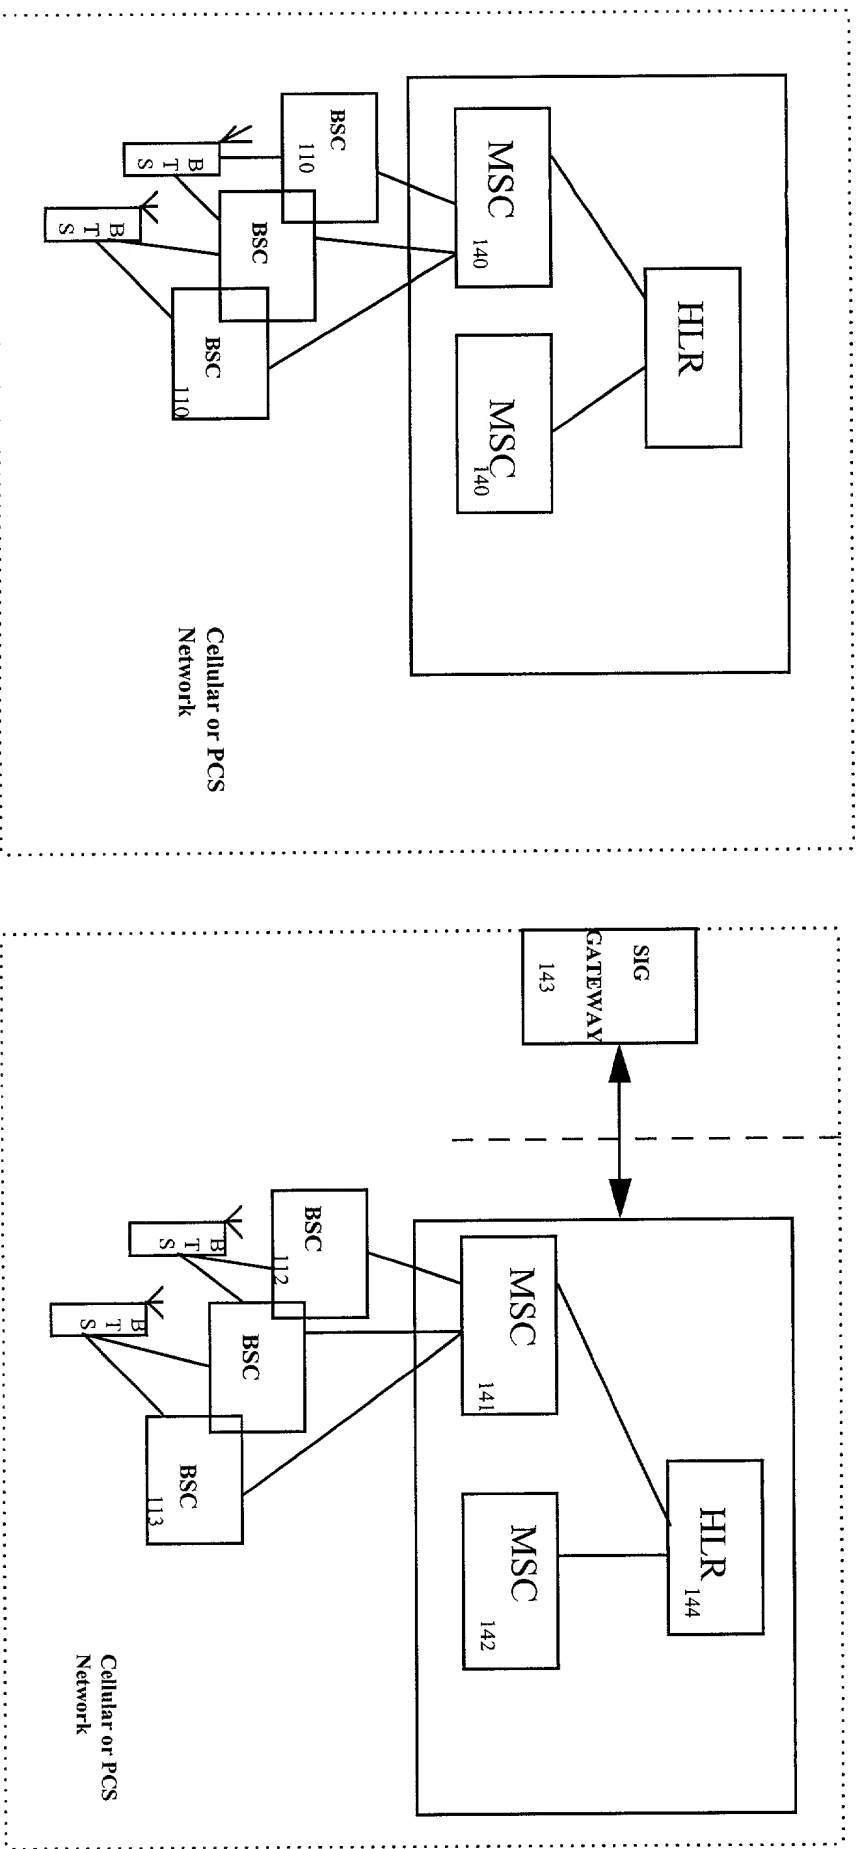


FIGURE 2
(PRIOR ART)

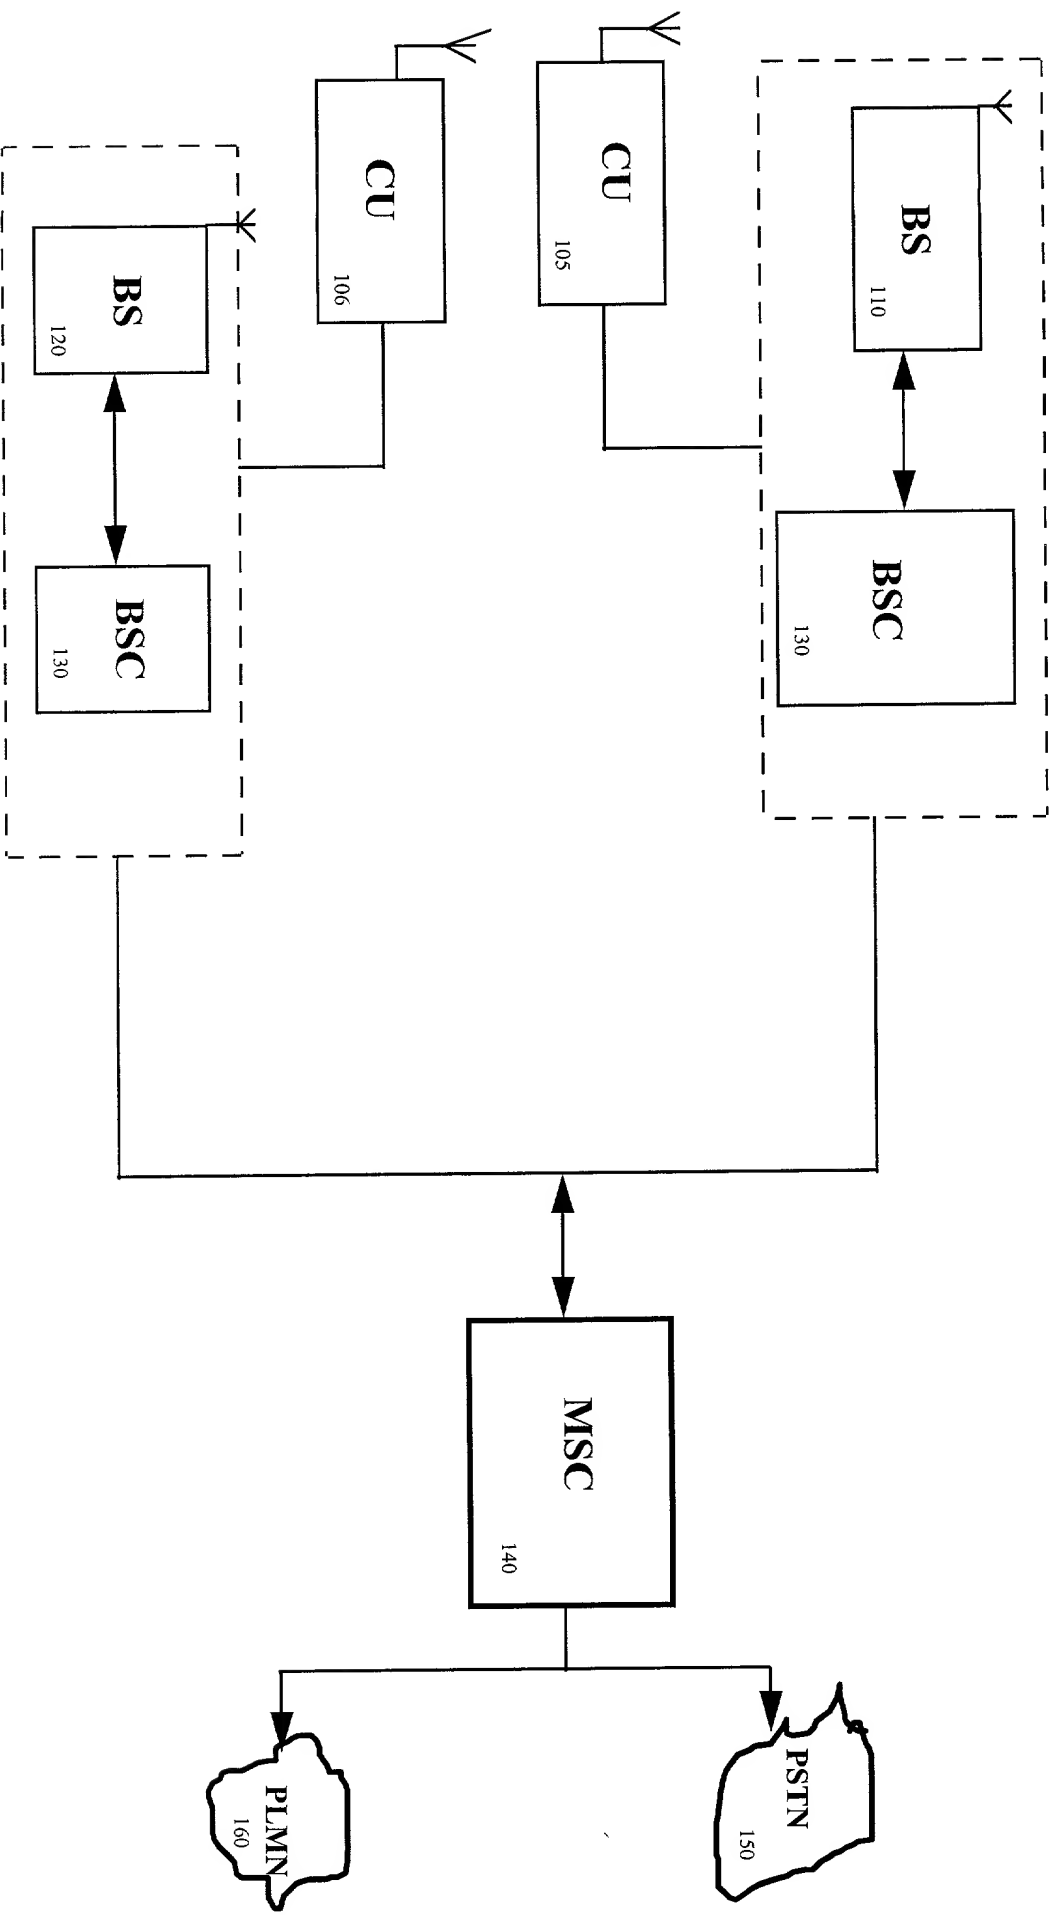


FIGURE 3

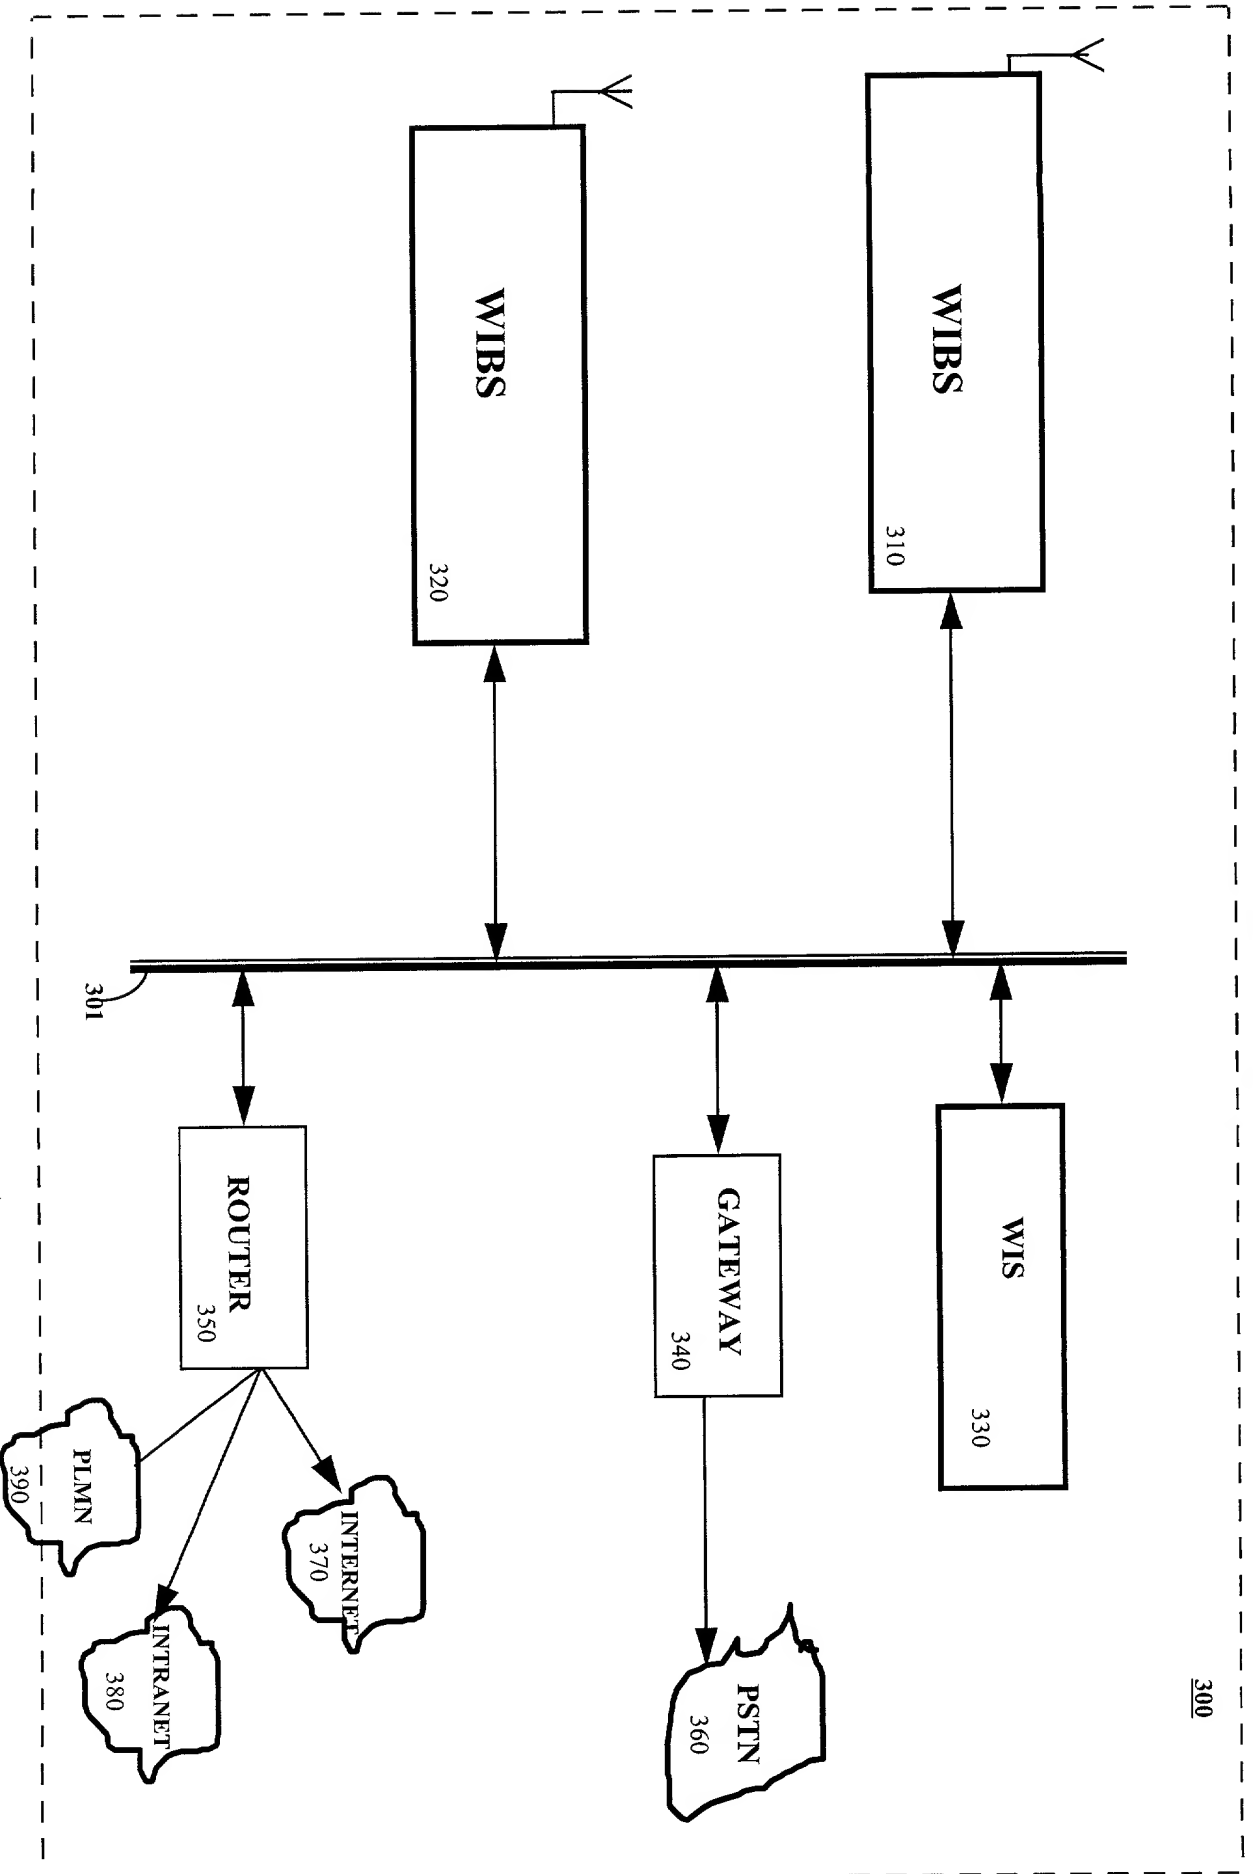


FIGURE 4

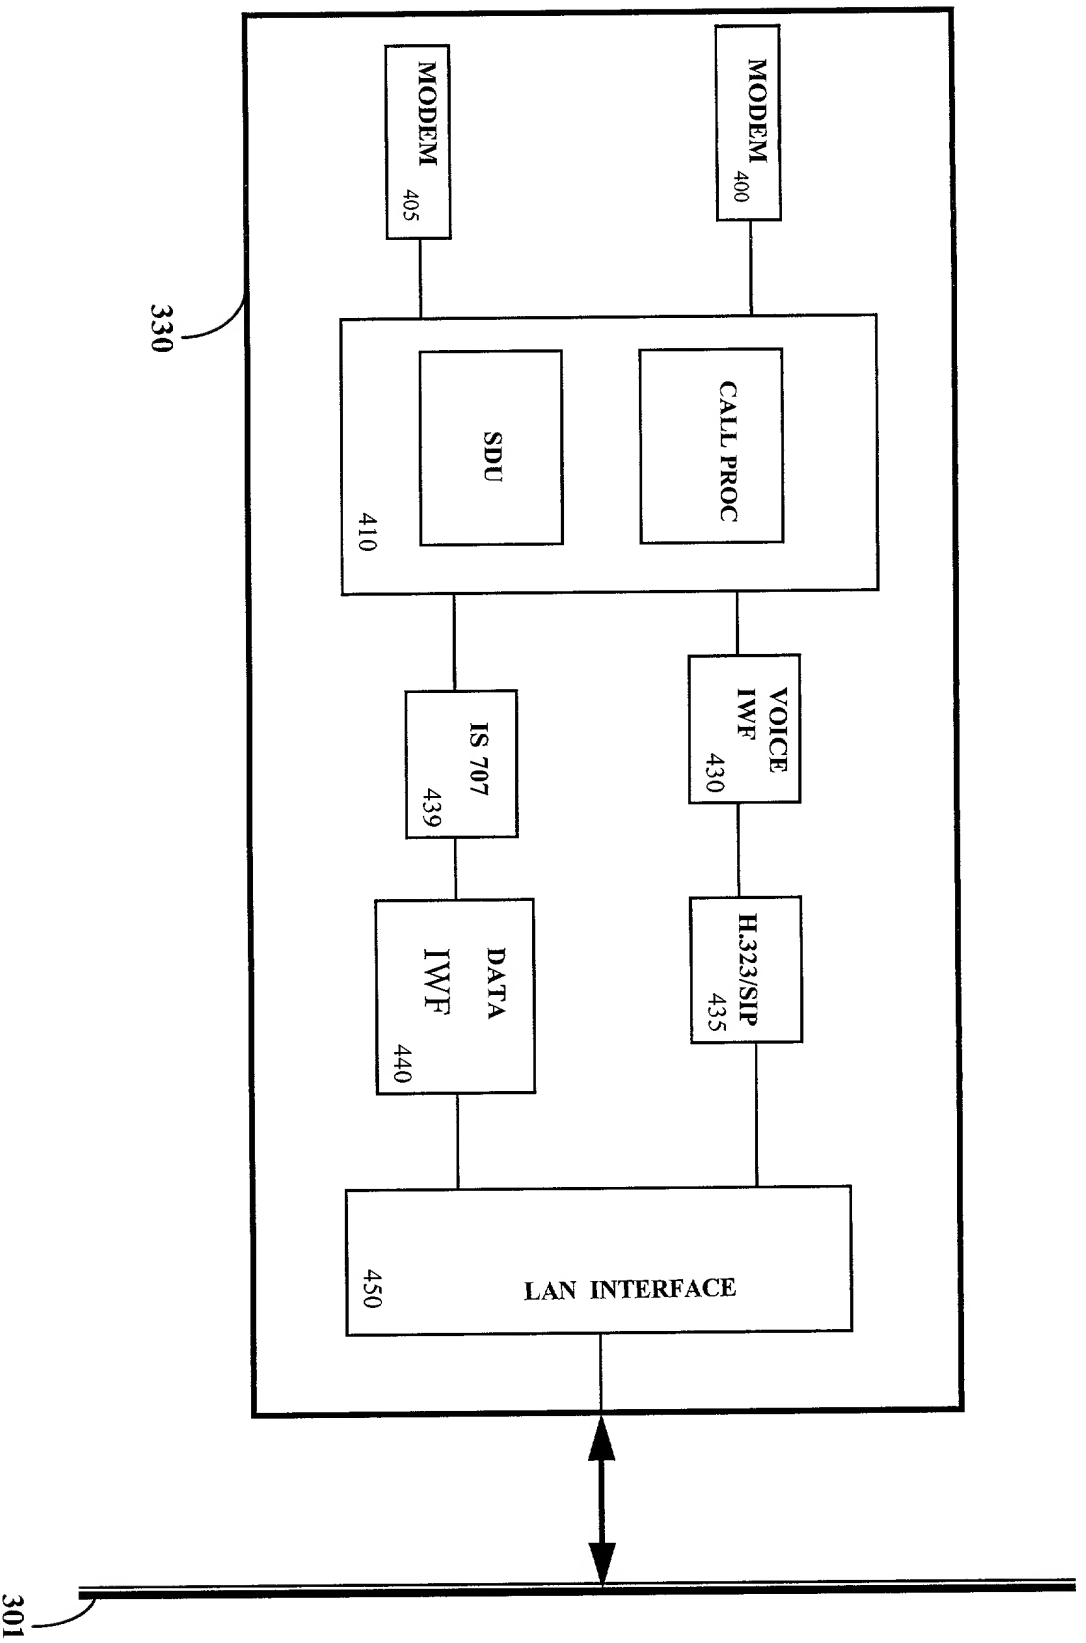


FIGURE 4B

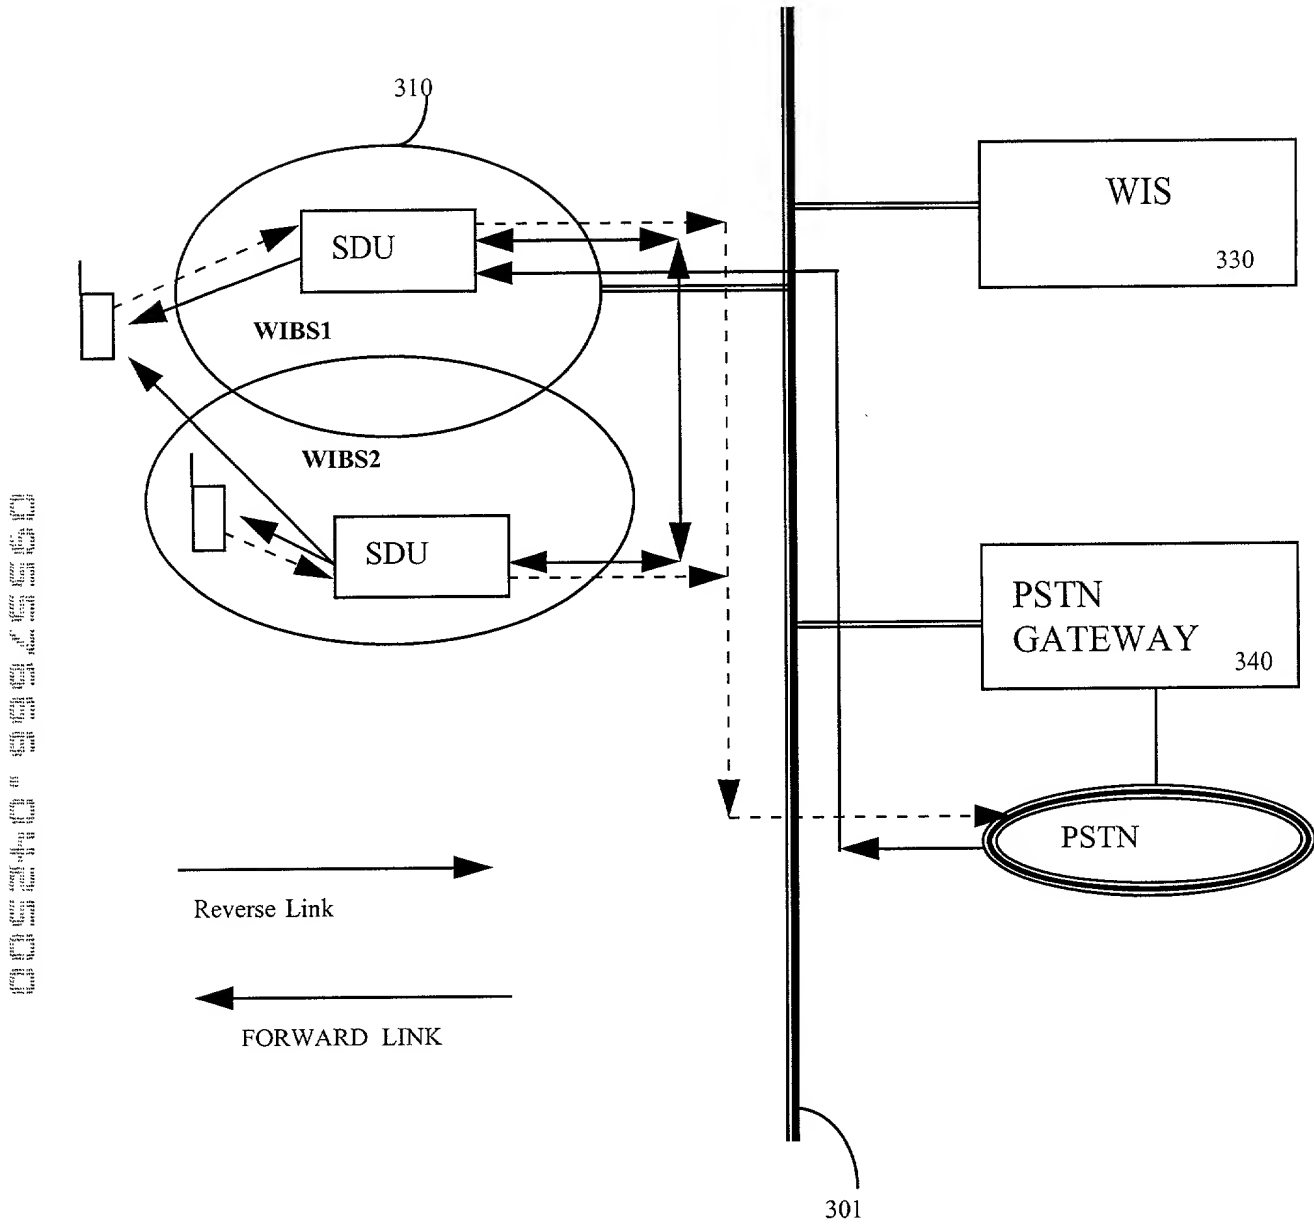


FIGURE 5

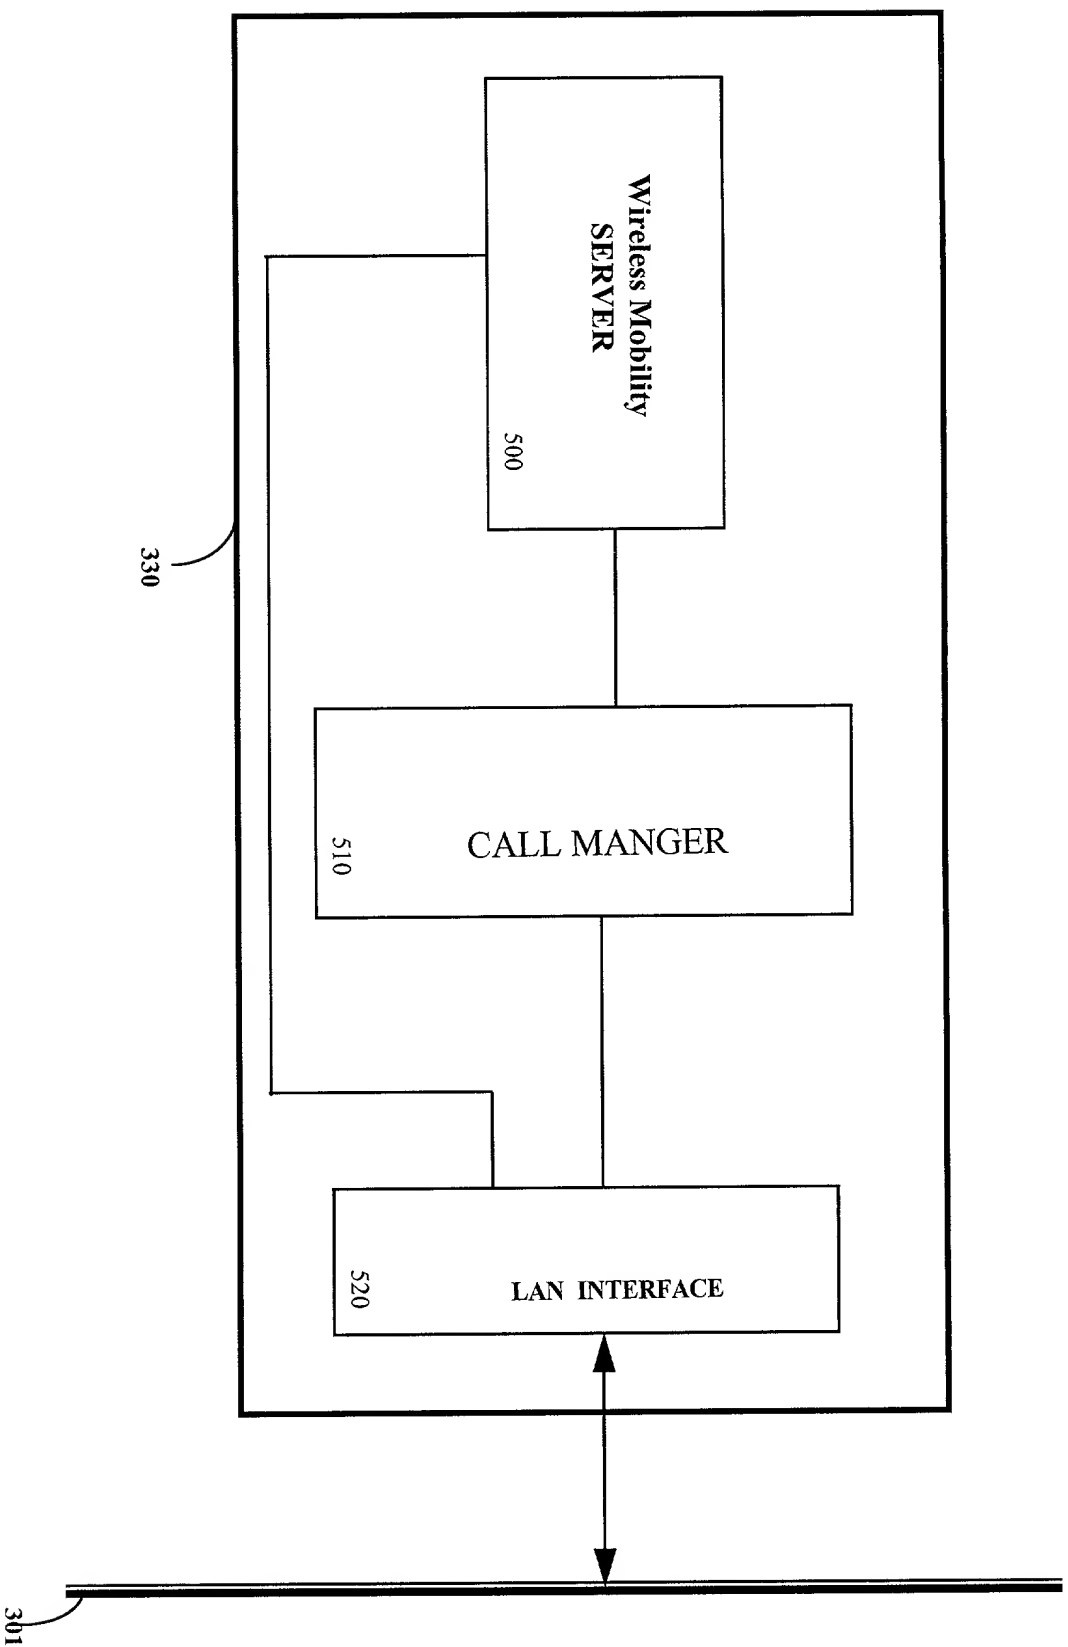


FIGURE 6

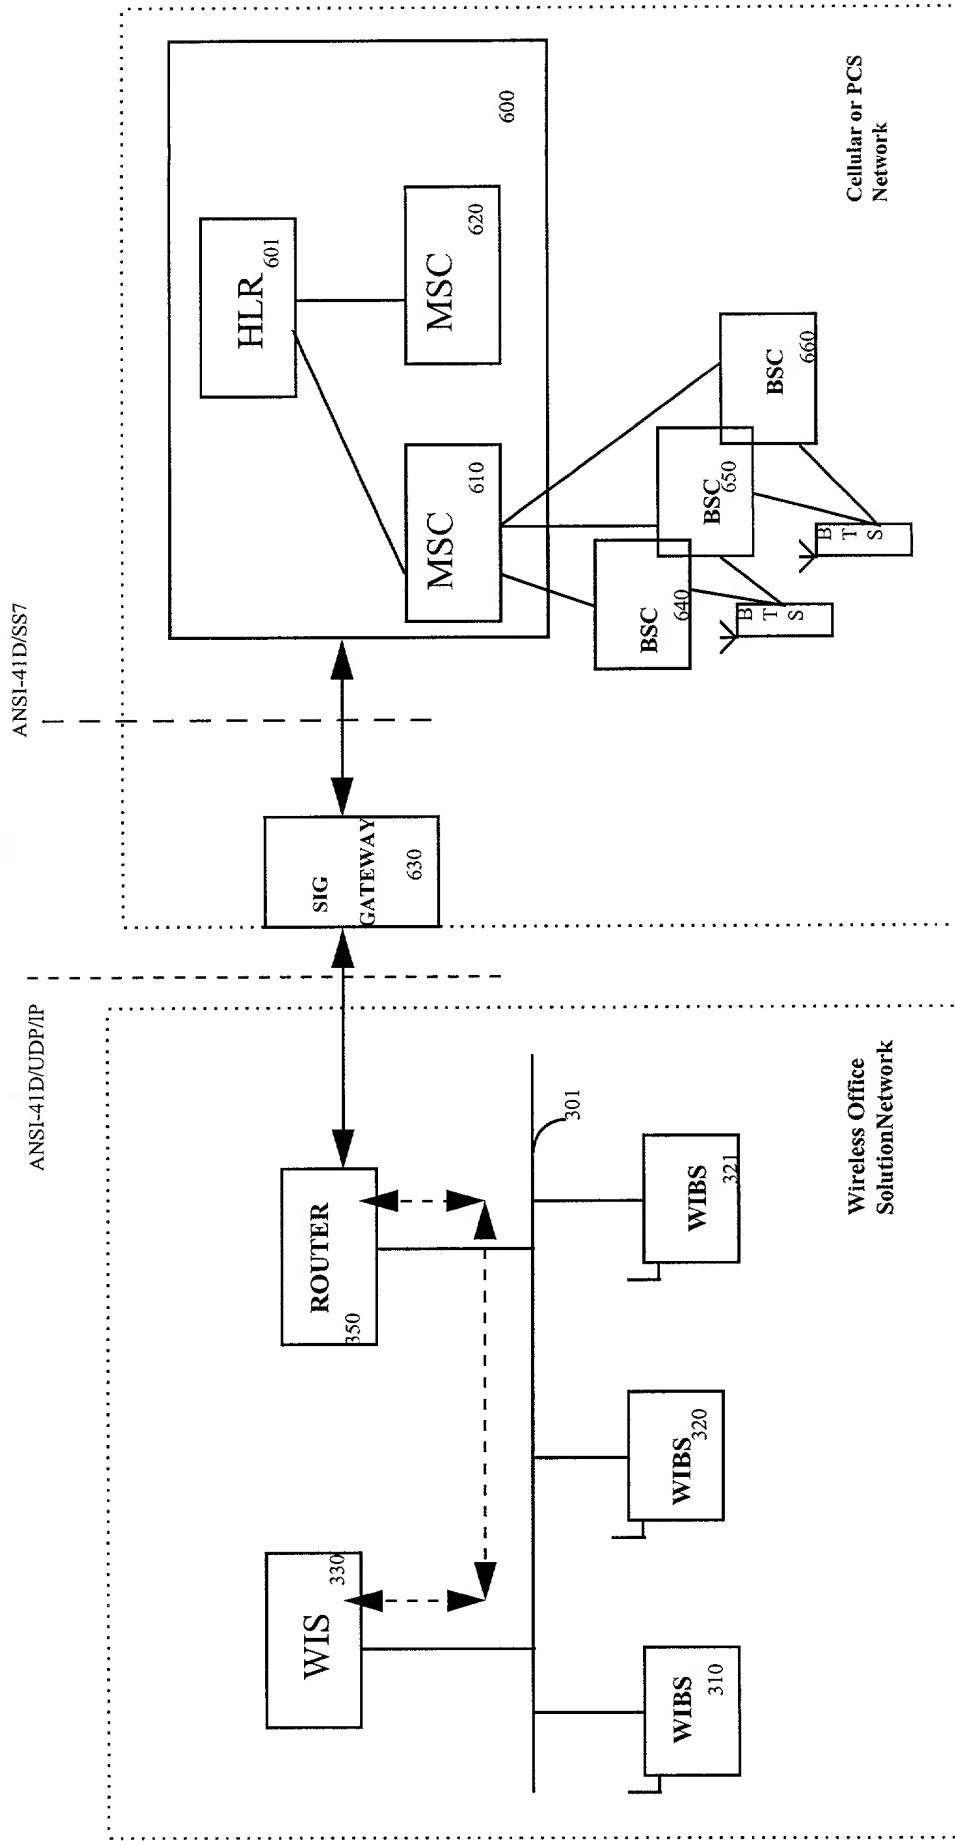


FIGURE 7


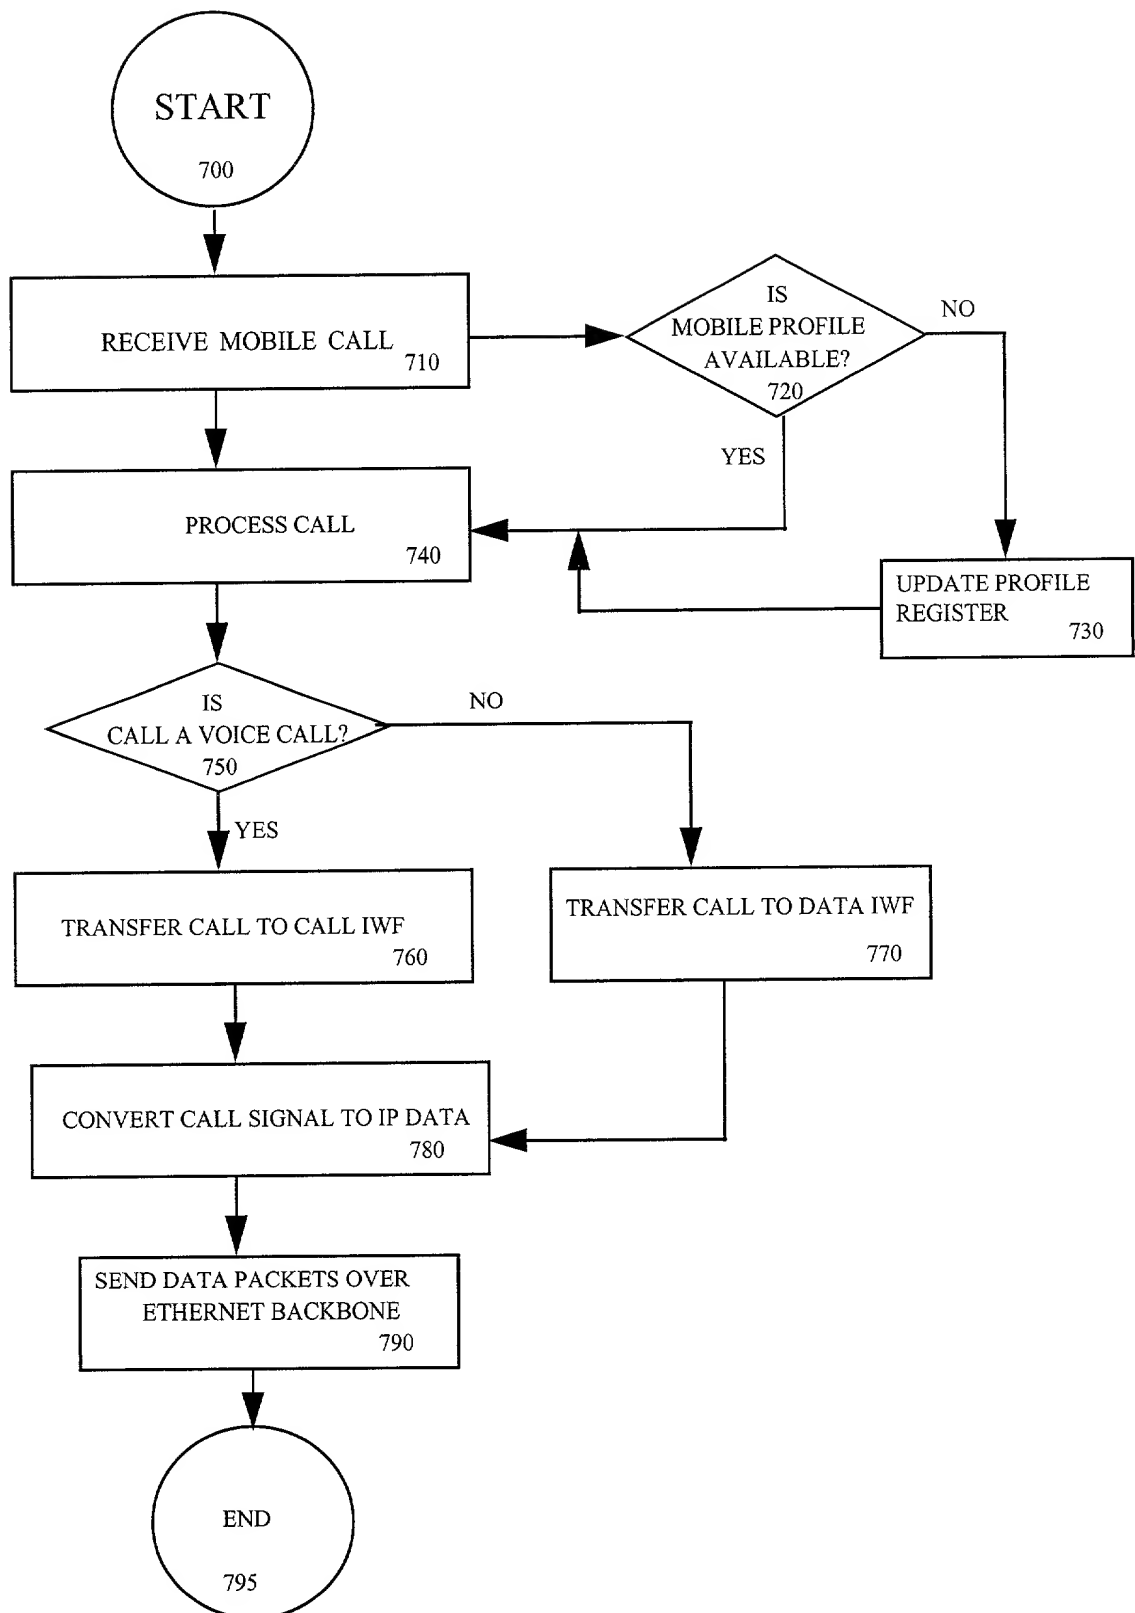


FIGURE 8

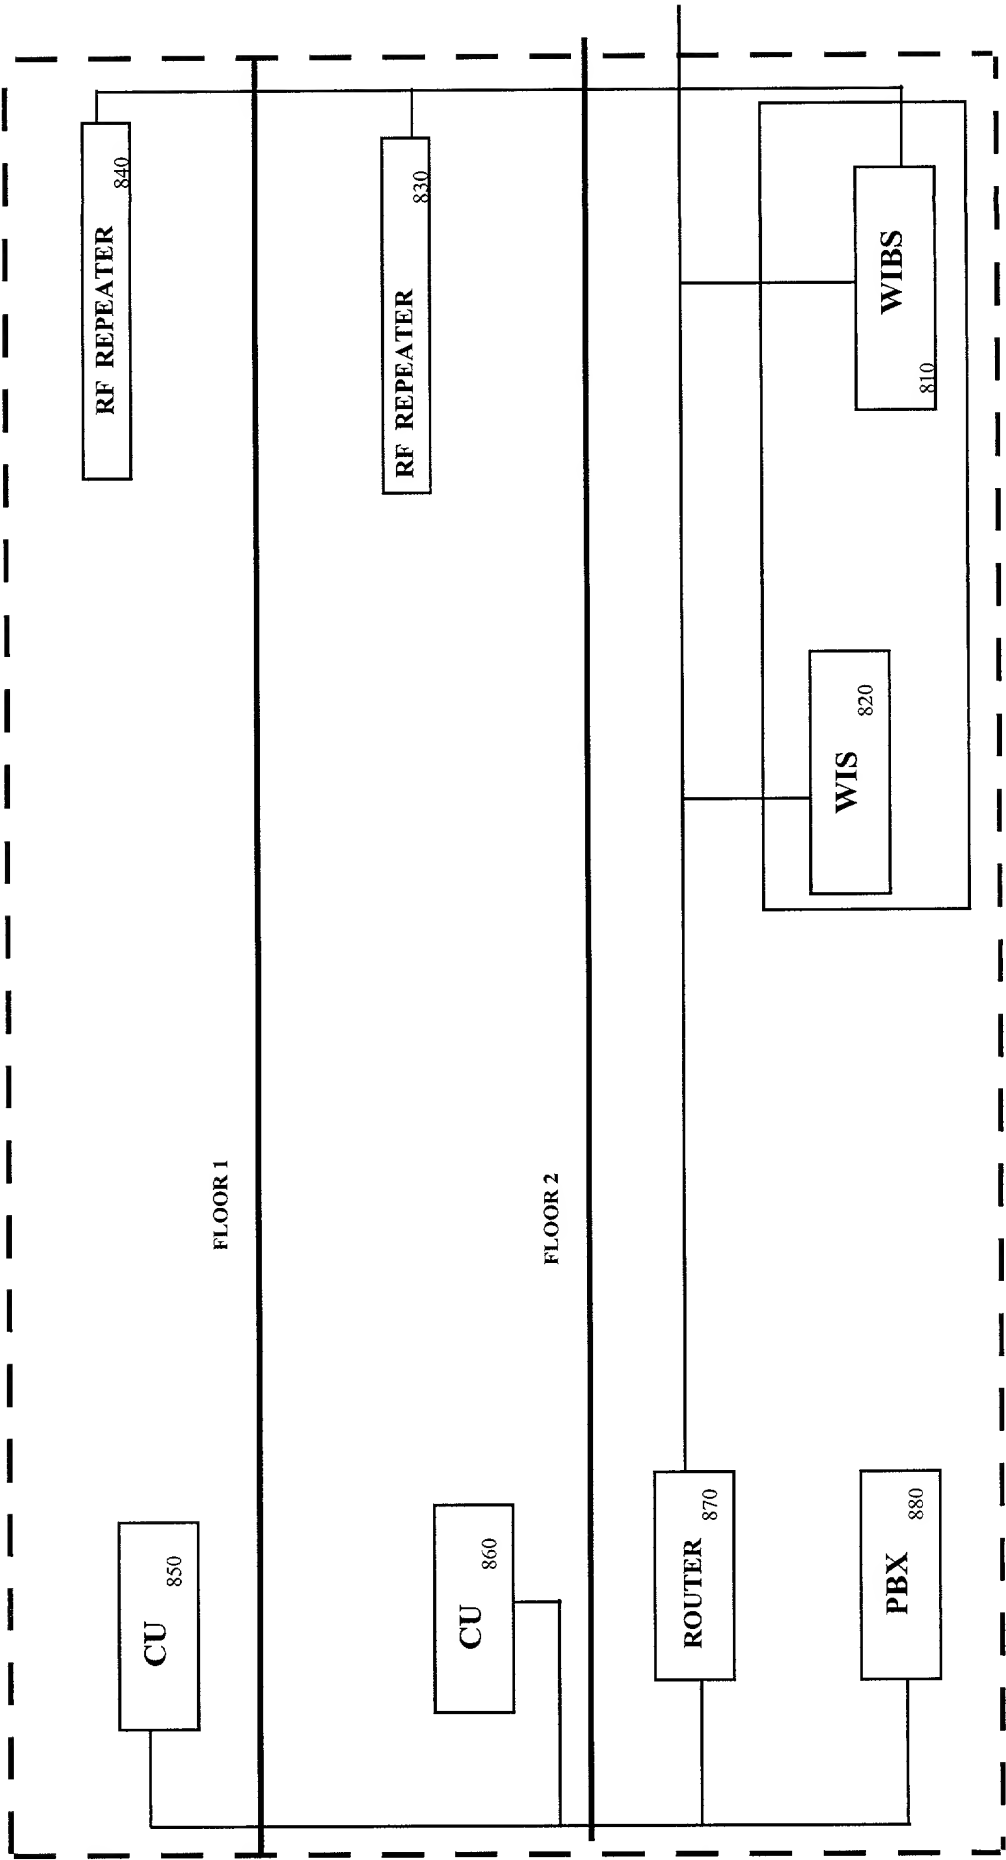

Declaration and Power of Attorney for a Patent Application

Declaration

As below named inventor, I hereby declare that my residence post office address, and citizenship are as stated below my name. Further, I hereby declare that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

IN BUILDING CODE DIVISION MULTIPLE ACCESS WIRELESS SYSTEM AND METHOD

the specification of which:

☒ is attached hereto, or
 was filed on as application serial no. : and
 was amended on

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; and

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

Foreign Priority Claim

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Number	Country	Date Filed	Priority Claimed
.....	yes no
.....	yes no

U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status (patented/pending/abandoned)
.....
.....

Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent Trademark Office connected therewith.

Duke Amaniampong

Registration No.: 45,806

Send Correspondence to:

EXIO COMMUNICATIONS, INC.
2362 Qume Drive, Suite C
San Jose, California 95131
(408) 938-9393

Signatures

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: Chol Su Kang

Inventor's Signature

Residence Fremont, California
(City State)

Date 4-24-00

Citizenship USA

P.O. Address 5474 Shattuck Avenue, Fremont, California 94555

Full Name of Second/Joint Inventor: Sang Kyoon Hyun

Inventor's Signature

Residence Santa Clara, California
(City State)

Date 4-24-00

Citizenship Korea

P.O. Address 3775 Flora Vista Avenue #510, Santa Clara, California 95051

Full Name of Third/Joint Inventor: Ki Hyun Joo

Inventor's Signature

Residence San Jose, California
(City State)

Date 4-24-00

Citizenship Korea

P.O. Address 20990 Valleygreen Drive #601, San Jose, California 95014